

# Entrematic Accessories

## New control and safety accessories

Entrematic presents the **new range of control and safety accessories** which perfectly reflects the latest contemporary design trends in the sector. The dark grey on the embossed surface of the containers matches perfectly with the black front: clean lines and simple shapes make **Entrematic accessories a winning choice.**



## Product specifications


EN



AXP2

AXK4 - AXK4P

AXR7

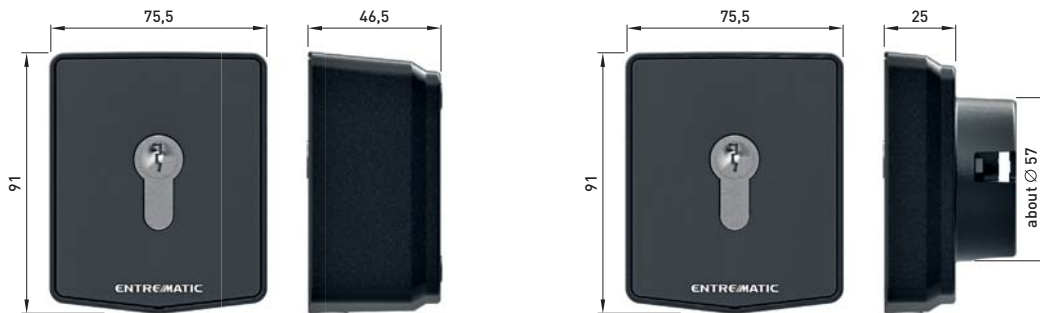

AXK5M - AXK5NM (version without cylinder)

AXK5I - AXK5NI (version without cylinder)

**Main functions**

Code	Description	Capacity	Power supply	Power input	Relay capacity	Operating temperature	Protection rating
AXP2	Wall-mounted photocell for outdoors	Configurable 10 m - 30 m max	24 V DC / 24 V AC	max 50 mA	24 V DC / 1 A max	-20°C +55°C	IP54

Code	Description	Contact capacity	Protection rating
AXK5I	Metal burglar-proof semi-recessed selector	2 x 2 A 30 V DC Max., NO/NC	IP54
AXK5M	Metal burglar-proof wall-mounted selector	2 x 2 A 30 V DC Max., NO/NC	IP54
AXK5NI	Metal burglar-proof semi-recessed selector, without cylinder	2 x 2 A 30 V DC Max., NO/NC	IP54
AXK5NM	Metal burglar-proof wall-mounted selector, without cylinder	2 x 2 A 30 V DC Max., NO/NC	IP54

Code	Description	Radio range	Power supply	Power input	Radio protocols	Operating temperature	Protection rating
AXK4	Keypad selector with 433.92 MHz radio transmission	50 - 150 m	9 V DC (6LR61 battery) or 12-24 V DC	Operation: 40 mA Max. Stand-by: 5 µA	Fixed Code, Rolling Code*, AES-128-bit Encrypted, PROTECTED Mode	-20°C +55°C	IP55
AXK4P	Keypad selector with 868.35 MHz radio transmission	50 - 150 m	9 V DC (6LR61 battery) or 12-24 V DC	Operation: 40 mA Max. Stand-by: 5 µA	Fixed Code, Rolling Code*, AES-128-bit Encrypted, PROTECTED Mode	-20°C +55°C	IP55

\* default

Code	Description	Reading distance	Power supply	Power input	Reader unit connection - plug-in card	Operating temperature	Protection rating
AXR7	RFID transponder proximity reader	60 mm with ISO format card 30 mm with code button	12 V DC (from LAN7S decoder unit)	approx. 100 mA	Max 100 m (70 m with 2 AXR7)	-20°C +55°C	IP54



**Entrematic Italy S.p.A.**  
 Largo U. Boccioni, 1 · 21040 Origgio (VA) · Italy  
 Tel +39 02 963911 · Fax: +39 02 9650314  
 ditec@entrematic.com  
 www.ditecentrematic.com · www.entrematic.com

